


Multidoor Access Control - 4 Door

eSSL-Access-8004

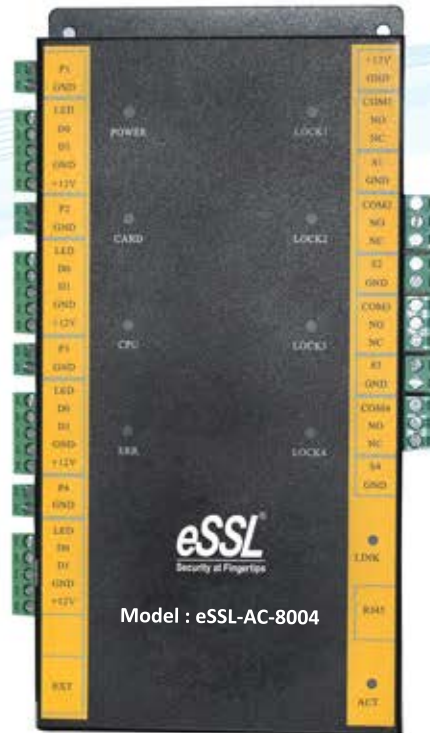

Specification

Card Capacity : 20,000
Event buffer : 1,00,000
Communication : TCP/IP 10M/100M adaptive
Function Description : Control 4 doors, enter via cards swiping and exit via buttons
PCB board size : 21.9 * 12.2 * 3.4cm
Controller case size : 273*228*65mm
Power supply : 12V DC 4-7A
Power consumption of circuit board : < 200mA
Reader input format : Wiegand 26/34
Card Reader supported : 4
Door control output : 4
Delay time for unlocking : 1-600 seconds(adjustable)
Operation Temperature : -40 °C - 70°C
Operation Humidity : 10-90 % RH, No Condensation
256 time Zones, 256 access levels
Anti-passback function
Interlock function
Multi-Card Opening function, Remote door opening
Real-Time monitoring via software

Power interruption protection measure : High Speed Memory,
Records never lose
Max Distance between Controllers : TCP/IP communication,
Fire and alarm linkage : Optional

Software and Database Supported :

eSSL Professional Door Control Software
Database Type:- MS Access / MS SQL