



SPEED TECHNOLOGY[®]
An ISO 9001 : 2015 Certified Company

Regd.Office : U-9, Kuber Complex, Dr. Yagnik Road,


Rajkot - 360 001 (INDIA)

Phone : +91 98242 99869 / 89808 02072

E-mail : info@speedtechnology.in

Website : www.speedtechnology.in

4MP ColorHunter with Wise-ISP Fixed Eyeball Network Camera IPC3624LE-ADF28(40)K-WP

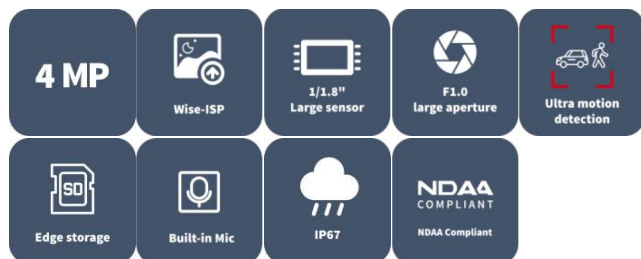

Features

- High quality image with 4 MP, 1/1.8" CMOS sensor and F1.0 large aperture lens
- 4 MP (2688 × 1520)@25/20 fps; 3 MP (2560 × 1440)@25/20 fps; 2 MP (2304 × 1296)@30/25 fps; 1080P (1920 × 1080)@30/25 fps
- Ultra 265, H.265, H.264, MJPEG
- Supports ColorHunter with Wise-ISP technology, deeply optimizing color, detail, and smear effects in extremely low-light scenes
- 120 dB true WDR technology enables clear image in strong light scene
- Supports 9:16 corridor mode
- Built-in mic
- White light, up to 30 m (98.4 ft) warm light distance
- MicroSD, up to 512 GB
- IP67 protection
- Supports PoE power supply
- 3-axis



SPEED TECHNOLOGY
An ISO 9001 : 2015 Certified Company

Regd.Office : U-9, Kuber Complex, Dr. Yagnik Road,

Rajkot - 360 001 (INDIA)

Phone : +91 98242 99869 / 89808 02072

E-mail : info@speedtechnology.in

Website : www.speedtechnology.in

Specifications

Model	IPC3624LE-ADF28WP	IPC3624LE-ADF40WP
Camera		
Max Resolution	4 MP	
Sensor	1/1.8" CMOS	
Min. Illumination	Color: 0.0003 Lux(F1.0, AGC ON)	
Shutter	Auto/Manual, 1 ~ 1/100000s	
Adjustment Angle	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°	
S/N	>52 dB	
WDR	120 dB	
Lens		
Focal Length	2.8 mm	4.0 mm
Iris Type	Fixed	
Iris	F1.0	
Field of View (H)	124.3°	96.1°
Field of View (V)	61.4°	52.2°
Field of View (D)	135°	113.5°
DORI		
DORI Distance (Lens)	2.8 mm	4 mm
DORI Distance (Detect)	43.4 m (142.4 ft.)	62.1 m (203.7 ft.)
DORI Distance (Observe)	17.4 m (57.1 ft.)	24.8 m (81.4 ft.)
DORI Distance (Recognize)	8.7 m (28.5ft.)	12.4 m (40.7 ft.)
DORI Distance (Identify)	4.3 m (14.1ft.)	6.2 m (20.3ft.)
Illuminator		
Supplemental Light	Warm light	
Light On/Off Control	Auto/Manual	
Illumination Distance (Warm Light)	30 m (98.4 ft.)	
Video		
Video Compression	Ultra 265, H.265, H.264, MJPEG	
H.264 Code Profile	Baseline profile, Main profile, High profile	
Frame Rate	Main Stream: 4 MP (2688 × 1520), max. 25 fps; 4 MP (2560 × 1440), max. 25 fps; 3 MP (2304 × 1296), max. 30 fps; 1080P (1920 × 1080), max. 30 fps; Sub Stream: 720P (1280 × 720), max. 30 fps; D1 (720 × 576), max. 30 fps; 640 × 480, max. 30 fps;	
Video Bit Rate	128 Kbps to 6144 Kbps	
U-code	Support	
OSD	Up to 4 OSDs	
Privacy Mask	Up to 4 areas	
ROI	Support	
Video Stream	Dual streams	
Image		
White Balance	Auto, Outdoor, Find, Sodium lamp, Locked, Auto2	



SPEED TECHNOLOGY
An ISO 9001 : 2015 Certified Company

Regd.Office : U-9, Kuber Complex, Dr. Yagnik Road,

Rajkot - 360 001 (INDIA)

Phone : +91 98242 99869 / 89808 02072

E-mail : info@speedtechnology.in

Website : www.speedtechnology.in

Smart Illumination	Support
Digital Noise Reduction	2D/3D DNR
Flip	Normal, Flip vertical, Flip horizontal, 180°, 90° Clockwise, 90° Anti-clockwise
Dewarping	N/A
HLC	Support
BLC	Support
Defog	Digital defog
Intelligent	
Smart Intrusion Prevention (Lite)	Intrusion, crossline detection (both detection are based on human body and vehicle detection)
Events	
Basic Detection	Motion detection, Ultra motion detection (based on human body and vehicle detection), Tampering alarm, Audio detection
General Function	Watermark, IP address filtering, Access policy, ARP protection, RTSP authentication, User authentication, HTTP authentication
Audio	
Audio Compression	G.711U/G.711A, AAC-LC
Audio Bitrate	G.711U/G.711A: 64 kbps, AAC-LC: 128 kbps
Two-way Audio	N/A
Suppression	Support
Sampling Rate	G.711U/G.711A: 8 kHz, AAC-LC: 8 kHz, 16 kHz, 48 kHz
Storage	
Edge Storage	MicroSD, up to 12 GB
Network Storage	ANR, NAS (NFS)
Network	
Protocols	IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, SSNTP, RSMP, TLS
Compatible Integration	ONVIF (Profile S, Profile G, Profile M), API, SDK
User/Host	Up to 32 users, 2 user levels, administrator and common user
Security	Password Protection, Strong Password, HTTPS encryption, Export Operation Logs, Basic and Digest Authentication for RTSP, Digest Authentication for HTTP, TLS 1.2, WSSE and Digest Authentication for ONVIF
Client	EZStation, APP
Web Browser	Plug-in required live view: IE 10+, Chrome 45+, Firefox 52+, Edge 79+, Plug-in free view: Chrome 57+, Firefox 58+, Edge 79+
Interface	
Audio I/O	N/A
Alarm I/O	N/A
Serial Port	N/A
Built-in Mic	Support
Built-in Speaker	N/A
WIFI	N/A
Network	1 × RJ45 10 M/100 M Base-TX Ethernet



SPEED TECHNOLOGY
An ISO 9001 : 2015 Certified Company

Regd.Office : U-9, Kuber Complex, Dr. Yagnik Road,

Rajkot - 360 001 (INDIA)

Phone : +91 98242 99869 / 89808 02072

E-mail : info@speedtechnology.in

Website : www.speedtechnology.in

Video Output	N/A
Certification	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN 61000-3-2, EN 55035) FCC (FCC 47 CFR Part 15 B)
Safety	CE LV (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Protection	IP67 (IEC 60529)
Environment	CE-RoHS (2011/65/EU); (EU) 2015/863; REE (2012/19/EU);
General	
Power	DC 12V±25%, PoE IEEE 802.3af
Power Consumption	Max. 2.8W
Power Interface	Ø5.5 mm coaxial power plug
Dimensions	Ø118 mm × 106 mm (Ø4.6" × 4.2") (Ø)
Weight	0.48 kg (1.06 lb.)
Material	Metal + Plastic
Working Environment	-30 °C to 60 °C (-22°F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Storage Environment	-30 °C to 60 °C (-22°F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Surge Protection	4 KV
Reset Button	Support
Web Client Language	13 Languages: English, Simplified Chinese, Polish, German, Russian, French, Korean, Dutch, Czech, Portuguese, Spanish, Spanish (Europe), Italian



SPEED TECHNOLOGY®

An ISO 9001 : 2015 Certified Company

Regd.Office : U-9, Kuber Complex, Dr. Yagnik Road,


Rajkot - 360 001 (INDIA)

Phone : +91 98242 99869 / 89808 02072

E-mail : info@speedtechnology.in

Website : www.speedtechnology.in

Di

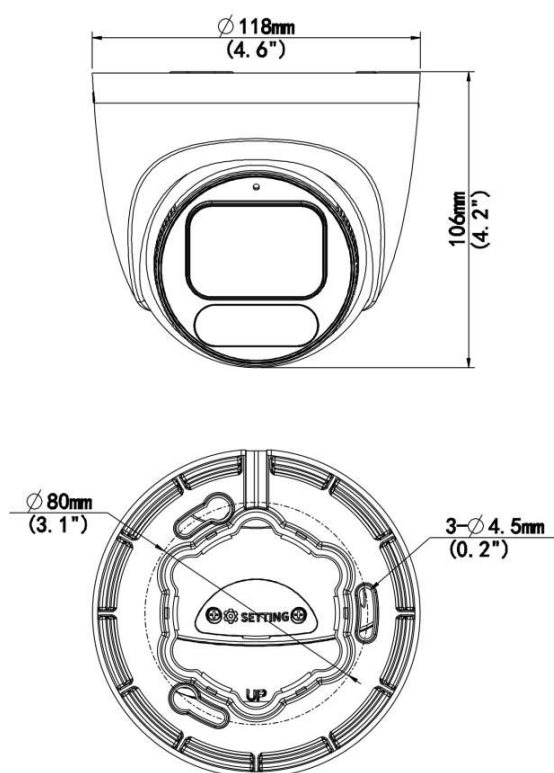

Accessories

TR-JB03-I-IN Junction Box for Turret Camera(Support wiring from behind)	TR-A01-IN NPT 3/4" Waterproof Cable Gland	TR-SE24-IN Dome Pendant Mounting Pole 200mm
		
TR-SE24-A-IN Dome Pendant Mounting Pole 500mm	TR-CM24-IN Dome Pendant Mounting Bracket(Indoor)	TR-JB07/WM03-G-IN-V2 Wall Mounting Assembling Bracket for 32 Fix-dome&Mini Fix-dome&Plastic Turret Camera
		



SPEED TECHNOLOGY[®]
An ISO 9001 : 2015 Certified Company

Regd. Office : U-9, Kuber Complex, Dr. Yagnik Road,

Rajkot - 360 001 (INDIA)

Phone : +91 98242 99869 / 89808 02072

E-mail : info@speedtechnology.in

Website : www.speedtechnology.in

TR-WM03-D-IN-V2	TR-UC08-C-V2	TR-UP06-C-IN-V2
Wall Mounting Bracket for 32 Fix-dome & Mini Fix-dome & Plastic Turret Camera	Bullet & Dome Corner Mounting Bracket	Pole Mounting Bracket for Bullet Junction Box Only
		